


# NK-60 ELECTRIC HOSE CRIMPING MACHINE MAX. 4" (DN100, -64)



OPTIONAL

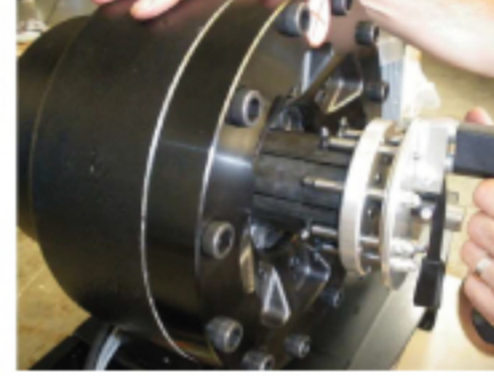

Powerful workshop crimping machine with large opening.  
Head protected with foam inserts

**Indicative Hose Capacity :**

2-SN and Industrial Low Pressure..... 4" (DN100; -64)  
4-SP/R12 .....2" (DN50; -32)  
4SH/R13/R15/Interlock : 2" (DN50; -32) acc. to fitting material  
Max. size for assembly with 2 x 90° elbows : max. 3" (DN63)

**Motor / Electrics :**

4 kW - 230/400V 3-PH  
4 kW - 230V 1-PH (25A)

**Radial press force :** 350 tons

**Opening :** Die size + 54 mm (Press path +15 mm)

**Opening without dies :** 182mm

**Master die shoe length :** 120mm

**Available die sizes (mm) :**

Ø 6/10/12/15/18/21/24/27/30/33/36/39/45/48/51/57/66/73/80/86  
/90//95/99/112/117/122/130/136 MM

**Dimensions :**

Width 800mm/ Depth : 440mm  
Height : 800mm

**Net weight (with full oil tank, w/o dies) :** 235 Kg

**Packing :**

Wooden crate conform to ISPM15  
Crate size : 110x78x110cms  
Gross weight (with 5 sets of dies) : 300 kgs

**Noise Level:**

< 70 dB(A) with standard hydraulic pump  
< 63 db(A) with optional silent pump (ELIKA)

**Die Chart**

Ø	6	8	10	12	15	18	21	24	27	30	33	36	39	42	45	48
L (mm)	56	56	56	56	56	56	56	70	70	70	70	70	70	70	100	100
Ø	51	54	57	66	70	73	80	86	90	95	99	112	117	122	130	136
L (mm)	100	100	100	100	100	120	120	120	120	120	120	120	120	120	120	120

