


# NKS-30-DC/12V

Hose Crimping Kit with splitted Head, 12 V Power pack and remote control box - Ideal for set up of mobile van



- Capacity up to 1 1/4" 4-SP
- R13/R15 Interlock up to 1"
- Ultra compact and light kit
- Light Crimping head thanks to aluminium head
- Head protected against contamination by foam pads
- Head and Power pack on easy to fix supports

Crimp head, 12V power pack and remote control box all splitted, in order to optimize the setup of the van to balance the weights in the vehicle (NKS-30 is delivered with cables length. 2m ,without hose, size 3/8" 2SN with metric fittings is required to link head to power pack

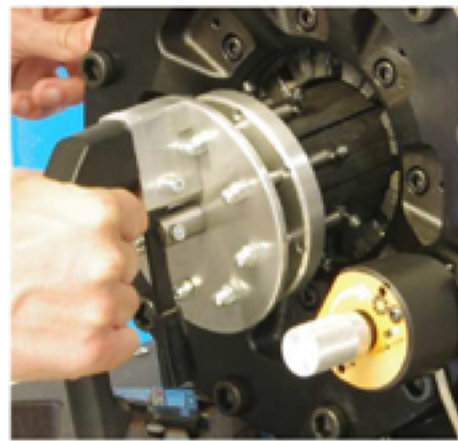

- ACCESORIES AND OPTIONS**
- Quick Die Change Tool (QCT-NLS)
  - Die Storage Panel with 12 die pods (WP-12PDR)
  - Individual Die Pods (PDR-1)

Technical Specifications NKS-30-DC/12V	
Hose capacity <i>For intermittent use in hose assembling</i>	2-SN et LP Industrial ..... 2" (DN50; -32) 4-SP/4-SH/R12 ..... 1 1/4" (DN32; -20) R13/R15/Interlock ..... 1" (DN25, -16) Limit with 2 x 90 elbows ..... max.. 1" (DN25) Max. crimping range..... 70mm (with Dies N° 66)
Motor / Electricity	2 000 W - 12 V.DC Connect to leisure battery 300A/h. Battery is not included.
Radial press force	135 Tons
Opening with dies	Ø Die + 28mm
Press path	Ø Die + 12mm
Opening without dies	98mm
Length of master dies	75mm
Machine size (mm)	Head only on bracket : Ø 260 H= 290 P= 330 Power pack + electrical panel : 500 x 280 x H 300 Remote Control Box : 160 x 85 x H 90
Weight (with oil, without dies)	58 KG Weight of the head only NKS-30 : 35 Kgs (incl. support bracket)
Standard packing (for transport)	Wood crate : 58x70x75cms, Gross weight (with 5 sets of die): 90 kgs
Noise level	< 80 dB(A)

Ø Die	Die Length (mm)
6	56
10	56
12	56
15	56
18	56
21	56
24	70
27	70
30	70
33	70
39	70
45	70
48	70
51	70
57	70
66	70